

ARTICLE IX.

Contributions to Electricity and Magnetism. By Joseph Henry, Professor of Natural Philosophy in the College of New Jersey, Princeton.

No. III.—On Electro-Dynamic Induction. Read November 2, 1838.

INTRODUCTION.

1. SINCE my investigations in reference to the influence of a spiral conductor, in increasing the intensity of a galvanic current, were submitted to the Society, the valuable paper of Dr Faraday, on the same subject, has been published, and also various modifications of the principle have been made by Sturgeon, Masson, Page and others, to increase the effects. The spiral conductor has likewise been applied by Cav. Antinori to produce a spark by the action of a thermo-electrical pile; and Mr Watkins has succeeded in exhibiting all the phenomena of hydro-electricity by the same means. Although the principle has been much extended by the researches of Dr Faraday, yet I am happy to state that the results obtained by this distinguished philosopher are not at variance with those given in my paper.

2. I now offer to the Society a new series of investigations in the same line, which I hope may also be considered of sufficient importance to merit a place in the Transactions.


3. The primary object of these investigations was to discover, if

possible, inductive actions in common electricity analogous to those found in galvanism. For this purpose a series of experiments was commenced in the spring of 1836, but I was at that time diverted, in part, from the immediate object of my research, by a new investigation of the phenomenon known in common electricity by the name of the lateral discharge. Circumstances prevented my doing any thing further, in the way of experiment, until April last, when most of the results which I now offer to the Society were obtained. The investigations are not as complete, in several points, as I could wish, but as my duties will not permit me to resume the subject for some months to come, I therefore present them as they are; knowing, from the interest excited by this branch of science in every part of the world, that the errors which may exist will soon be detected, and the truths be further developed.

4. The experiments are given nearly in the order in which they were made; and in general they are accompanied by the reflections which led to the several steps of the investigation. The whole series is divided, for convenience of arrangement, into six sections, although the subject may be considered as consisting, principally, of two parts. The first relating to a new examination of the induction of galvanic currents; and the second to the discovery of analogous results in the discharge of ordinary electricity.*

5. The principal articles of apparatus used in the experiments, consist of a number of flat coils of copper riband, which will be desig-

Fig. 1.

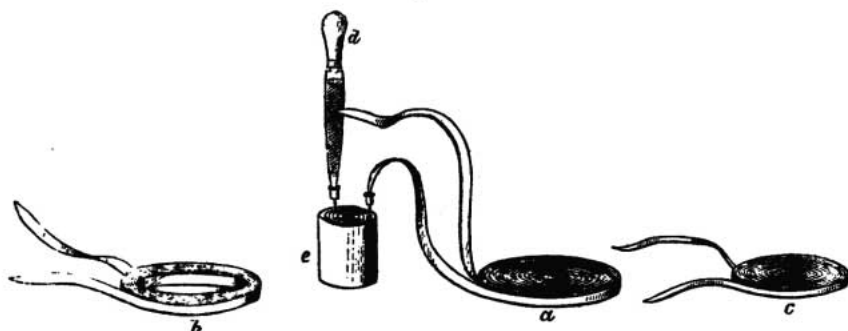

a represents coil No. 1, *b* coil No. 2, and *c* coil No. 3; *e* the battery, *d* the rasp.

* The several paragraphs are numbered in succession, from the first to the last, after the mode adopted by Mr Faraday, for convenience of reference.


nated by the names of coil No. 1, coil No. 2, &c.; also of several coils of long wire; and these, to distinguish them from the ribands, will be called helix No. 1, helix No. 2, &c.

6. Coil No. 1 is formed of thirteen pounds of copper plate, one inch and a half wide and ninety-three feet long. It is well covered with two coatings of silk, and was generally used in the form represented in Fig. 1, which is that of a flat spiral sixteen inches in diameter. It was however sometimes formed into a ring of larger diameter, as is shown in Fig. 4, Section III.

7. Coil No. 2 is also formed of copper plate, of the same width and thickness as coil No. 1. It is, however, only sixty feet long. Its form is shown at *b*, Fig. 1. The opening at the centre is sufficient to admit helix No. 1. Coils No. 3, 4, 5, 6, &c. are all about sixty feet long, and of copper plate of the same thickness, but of half the width of coil No. 1.

8. Helix No. 1 consists of sixteen hundred and sixty yards of copper wire, $\frac{1}{16}$ th of an inch in diameter. No. 2, of nine hundred and ninety yards; and No. 3, of three hundred and fifty yards, of the same wire. These helices are shown in Fig. 2, and are so adjusted in size

Fig. 2.



a represents helix No. 1, *b* helix No. 2, *c* helix No. 3. as to fit into each other; thus forming one long helix of three thousand yards: or, by using them separately, and in different combinations, seven helices of different lengths. The wire is covered with cotton thread, saturated with beeswax, and between each stratum of spires a coating of silk is interposed.

9. Helix No. 4 is shown at *a*, Fig. 4, Section III.; it is formed of five hundred and forty-six yards of wire, $\frac{1}{16}$ th of an inch in diameter, the several spires of which are insulated by a coating of cement. Helix No. 5 consists of fifteen hundred yards of silvered copper wire, $\frac{1}{16}$ th of an inch in diameter, covered with cotton, and is of the form of No. 4.

10. Besides these I was favoured with the loan of a large spool of copper wire, covered with cotton, $\frac{1}{16}$ th of an inch in diameter, and five miles long. It is wound on a small axis of iron, and forms a solid cylinder of wire, eighteen inches long, and thirteen in diameter.

11. For determining the direction of induced currents, a magnetiz-

ing spiral was generally used, which consists of about thirty spires of copper wire, in the form of a cylinder, and so small as just to admit a sewing needle into the axis.

12. Also a small horseshoe is frequently referred to, which is formed of a piece of soft iron, about three inches long, and $\frac{2}{3}$ ths of an inch thick; each leg is surrounded with about five feet of copper bell wire. This length is so small, that only a current of electricity of considerable quantity can develop the magnetism of the iron. The instrument is used for indicating the existence of such a current.

13. The battery used in most of the experiments is shown in Fig. 1. It is formed of three concentric cylinders of copper, and two interposed cylinders of zinc. It is about eight inches high, five inches in diameter, and exposes about one square foot and three quarters of zinc surface, estimating both sides of the metal. In some of the experiments a larger battery was used, weakly charged, but all the results mentioned in the paper, except those with a Cruickshank trough, can be obtained with one or two batteries of the above size, particularly if excited by a strong solution. The manner of interrupting the circuit of the conductor by means of a rasp, *b*, is shown in the same Figure.

SECTION I.

Conditions which influence the induction of a Current on itself.

14. The phenomenon of the spiral conductor is at present known by the name of the induction of a current on itself, to distinguish it from the induction of the secondary current, discovered by Dr Faraday. The two, however, belong to the same class, and experiments render it probable that the spark given by the long conductor is, from the natural electricity of the metal, disturbed for an instant by the induction of the primary current. Before proceeding to the other parts of these investigations, it is important to state the results of a number of preliminary experiments, made to determine more definitely the conditions which influence the action of the spiral conductor.

15. When the electricity is of low intensity, as in the case of the thermo-electrical pile, or a large single battery weakly excited with dilute acid, the flat riband coil No. 1, ninety-three feet long, is found to

give the most brilliant deflagrations, and the loudest snaps from a surface of mercury. The shocks, with this arrangement, are, however, very feeble, and can only be felt in the fingers or through the tongue.

16. The induced current in a short coil, which thus produces deflagration, but not shocks, may, for distinction, be called one of quantity.

17. When the length of the coil is increased, the battery continuing the same, the deflagrating power decreases, while the intensity of the shock continually increases. With five riband coils, making an aggregate length of three hundred feet, and the small battery, Fig. 1, the deflagration is less than with coil No. 1, but the shocks are more intense.

18. There is, however, a limit to this increase of intensity of the shock, and this takes place when the increased resistance or diminished conduction of the lengthened coil begins to counteract the influence of the increasing length of the current. The following experiment illustrates this fact. A coil of copper wire $\frac{1}{16}$ th of an inch in diameter, was increased in length by successive additions of about thirty-two feet at a time. After the first two lengths, or sixty-four feet, the brilliancy of the spark began to decline, but the shocks constantly increased in intensity, until a length of five hundred and seventy-five feet was obtained, when the shocks also began to decline. This was then the proper length to produce the maximum effect with a single battery, and a wire of the above diameter.

19. When the intensity of the electricity of the battery is increased, the action of the short riband coil decreases. With a Cruickshank's trough of sixty plates, four inches square, scarcely any peculiar effect can be observed, when the coil forms a part of the circuit. If however the length of the coil be increased in proportion to the intensity of the current, then the inductive influence becomes apparent. When the current, from ten plates of the above mentioned trough, was passed through the wire of the large spool (10), the induced shock was too severe to be taken through the body. Again, when a small trough of twenty-five one-inch plates, which alone would give but a very feeble shock, was used with helix No. 1, an intense shock was received from the induction, when the contact was broken. Also a slight shock in this arrangement is given when the contact is formed, but it is very feeble

in comparison with the other. The spark, however, with the long wire and compound battery is not as brilliant as with the single battery and the short riband coil.

20. When the shock is produced from a long wire, as in the last experiments, the size of the plates of the battery may be very much reduced, without a corresponding reduction of the intensity of the shock: This is shown in an experiment with the large spool of wire (10). A very small compound battery was formed of six pieces of copper bell wire, about one inch and a half long, and an equal number of pieces of zinc of the same size. When the current from this was passed through the five miles of the wire of the spool, the induced shock was given at once to twenty-six persons joining hands. This astonishing effect placed the action of a coil in a striking point of view.

21. With the same spool and the single battery used in the former experiments, no shock, or at most a very feeble one, could be obtained. A current, however, was found to pass through the whole length, by its action on the galvanometer; but it was not sufficiently powerful to induce a current which could counteract the resistance of so long a wire.

22. The induced current in these experiments may be considered as one of *considerable intensity*, and *small quantity*.

23. The form of the coil has considerable influence on the intensity of the action. In the experiments of Dr Faraday, a long cylindrical coil of thick copper wire, inclosing a rod of soft iron, was used. This form produces the greatest effect when magnetic reaction is employed; but in the case of simple galvanic induction, I have found the form of the coils and helices represented in the figures most effectual. The several spires are more nearly approximated, and therefore they exert a greater mutual influence. In some cases, as will be seen hereafter, the ring form, shown in Fig. 4, is most effectual.

24. In all cases the several spires of the coil should be well insulated, for although in magnetizing soft iron, and in analogous experiments, the touching of two spires is not attended with any great reduction of action; yet in the case of the induced current, as will be shown in the progress of these investigations, a single contact of two spires is sometimes sufficient to neutralize the whole effect.

25. It must be recollected that all the experiments with these coils and helices, unless otherwise mentioned, are made without the reaction of iron temporarily magnetized; since the introduction of this would, in some cases, interfere with the action, and render the results more complex.

SECTION II.


Conditions which influence the production of Secondary Currents.

26. The secondary currents, as it is well known, were discovered in the induction of magnetism and electricity, by Dr Faraday, in 1831. But he was at that time urged to the exploration of new, and apparently richer veins of science, and left this branch to be traced by others. Since then, however, attention has been almost exclusively directed to one part of the subject, namely, the induction from magnetism, and the perfection of the magneto-electrical machine. And I know of no attempts, except my own, to review and extend the purely electrical part of Dr Faraday's admirable discovery.

27. The energetic action of the flat coil, in producing the induction of a current on itself, led me to conclude that it would also be the most proper means for the exhibition and study of the phenomena of the secondary galvanic currents.

28. For this purpose coil No. 1 was arranged to receive the current from the small battery, and coil No. 2 placed on this, with a plate of glass interposed to insure perfect insulation; as often as the circuit of

Fig. 3.

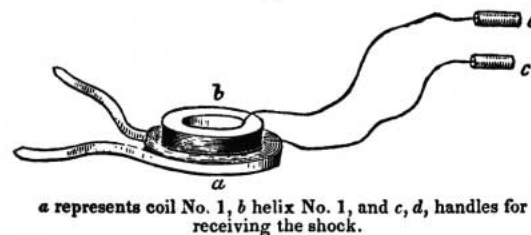

a represents coil No. 1, b helix No. 1, and c, d, handles for receiving the shock.

No. 1 was interrupted, a powerful secondary current was induced in No. 2. The arrangement is the same as that exhibited in Fig. 3, with the exception that in this the compound helix is represented as receiving the in-

duction, instead of coil No. 2.

29. When the ends of the second coil were rubbed together, a spark was produced at the opening. When the same ends were joined by

the magnetizing spiral (11), the inclosed needle became strongly magnetic. Also when the secondary current was passed through the wires of the iron horseshoe (12), magnetism was developed; and when the ends of the second coil were attached to a small decomposing apparatus, of the kind which accompanies the magneto-electrical machine, a stream of gas was given off at each pole. The shock, however, from this coil is very feeble, and can scarcely be felt above the fingers.

30. This current has therefore the properties of one of moderate intensity, but considerable quantity.

31. Coil No. 1 remaining as before, a longer coil, formed by uniting Nos. 3, 4 and 5, was substituted for No. 2. With this arrangement, the spark produced when the ends were rubbed together, was not as brilliant as before; the magnetizing power was much less; decomposition was nearly the same, but the shocks were more powerful, or, in other words, the intensity of the induced current was increased by an increase of the length of the coil, while the quantity was apparently decreased.

32. A compound helix, formed by uniting Nos. 1 and 2, and therefore containing two thousand six hundred and fifty yards of wire, was next placed on coil No. 1. The weight of this helix happened to be precisely the same as that of coil No. 2, and hence the different effects of the same quantity of metal in the two forms of a long and short conductor, could be compared. With this arrangement the magnetizing effects, with the apparatus before mentioned, disappeared. The sparks were much smaller, and also the decomposition less, than with the short coil; but the shock was almost too intense to be received with impunity, except through the fingers of one hand. A circuit of fifty-six of the students of the senior class, received it at once from a single rupture of the battery current, as if from the discharge of a Leyden jar weakly charged. The secondary current in this case was one of small quantity, but of great intensity.

33. The following experiment is important in establishing the fact of a limit to the increase of the intensity of the shock, as well as the power of decomposition, with a wire of a given diameter. Helix No. 5, which consists of wire only $\frac{1}{13}$ th of an inch in diameter, was placed

on coil No. 2, and its length increased to about seven hundred yards. With this extent of wire, neither decomposition nor magnetism could be obtained, but shocks were given of a peculiarly pungent nature; they did not however produce much muscular action. The wire of the helix was further increased to about fifteen hundred yards; the shock was now found to be scarcely perceptible, in the fingers.

34. As a counterpart to the last experiment, coil No. 1 was formed into a ring of sufficient internal diameter to admit the great spool of wire (11), and with the whole length of this (which, as has before been stated, is five miles) the shock was found so intense as to be felt at the shoulder, when passed only through the forefinger and thumb. Sparks and decomposition were also produced, and needles rendered magnetic. The wire of this spool is $\frac{1}{13}$ th of an inch thick, and we therefore see from this experiment, that by increasing the diameter of the wire, its length may also be much increased, with an increased effect.

35. The fact (33) that the induced current is diminished by a further increase of the wire, after a certain length has been attained, is important in the construction of the magneto-electrical machine, since the same effect is produced in the induction of magnetism. Dr Goddard of Philadelphia, to whom I am indebted for coil No. 5, found that when its whole length was wound on the iron of a temporary magnet, no shocks could be obtained. The wire of the machine may therefore be of such a length, relative to its diameter, as to produce shocks, but no decomposition; and if the length be still further increased, the power of giving shocks may also become neutralized.

36. The inductive action of coil No. 1, in the foregoing experiments, is precisely the same as that of a temporary magnet in the case of the magneto-electrical machine. A short thick wire around the armature gives brilliant deflagrations, but a long one produces shocks. This fact, I believe, was first discovered by my friend Mr Saxton, and afterwards investigated by Sturgeon and Lentz.

37. We might, at first sight, conclude, from the perfect similarity of these effects, that the currents which, according to the theory of Ampere, exist in the magnet, are like those in the short coil, of great

quantity and feeble intensity; but succeeding experiments will show that this is not necessarily the case.

38. All the experiments given in this section have thus far been made with a battery of a single element. This condition was now changed, and a Cruickshank trough of sixty pairs substituted. When the current from this was passed through the riband coil No. 1, no indication, or a very feeble one, was given of a secondary current in any of the coils or helices, arranged as in the preceding experiments. The length of the coil, in this case, was not commensurate with the intensity of the current from the battery. But when the long helix, No. 1, was placed instead of coil No. 1, a powerful inductive action was produced on each of the articles, as before.

39. First, helices No. 2 and 3 were united into one, and placed within helix No. 1, which still conducted the battery current. With this disposition a secondary current was produced, which gave intense shocks but feeble decomposition, and no magnetism in the soft iron horseshoe. It was therefore one of intensity, and was induced by a battery current also of intensity.

40. Instead of the helix used in the last experiment for receiving the induction, one of the coils (No. 3) was now placed on helix No. 1, the battery remaining as before. With this arrangement the induced current gave no shocks, but it magnetized the small horseshoe; and when the ends of the coil were rubbed together, produced bright sparks. It had therefore the properties of a current of quantity; and it was produced by the induction of a current, from the battery, of intensity.

41. This experiment was considered of so much importance, that it was varied and repeated many times, but always with the same result; it therefore establishes the fact *that an intensity current can induce one of quantity*, and, by the preceding experiments, the converse has also been shown, that *a quantity current can induce one of intensity*.

42. This fact appears to have an important bearing on the law of the inductive action, and would seem to favour the supposition that the lower coil, in the two experiments with the long and short sec-

dary conductors, exerted the same amount of inductive force, and that in one case this was expended (to use the language of theory) in giving a great velocity to a small quantity of the fluid, and in the other in producing a slower motion in a larger current; but in the two cases, were it not for the increased resistance to conduction in the longer wire, the quantity multiplied by the velocity would be the same. This, however, is as yet an hypothesis, but it enables us to conceive how intensity and quantity may both be produced from the same induction.

43. From some of the foregoing experiments we may conclude, that the quantity of electricity in motion in the helix is really less than in the coil, of the same weight of metal; but this may possibly be owing simply to the greater resistance offered by the longer wire. It would also appear, if the above reasoning be correct, that to produce the most energetic physiological effects, only a small quantity of electricity, moving with great velocity, is necessary.

44. In this and the preceding section, I have attempted to give only the general conditions which influence the galvanic induction. To establish the law would require a great number of more refined experiments, and the consideration of several circumstances which would affect the results, such as the conduction of the wires, the constant state of the battery, the method of breaking the circuit with perfect regularity, and also more perfect means than we now possess of measuring the amount of the inductive action; all these circumstances render the problem very complex.


SECTION III.

On the Induction of Secondary Currents at a distance.

45. In the experiments given in the two preceding Sections. the conductor which received the induction, was separated from that which transmitted the primary current by the thickness only of a pane of glass; but the action from this arrangement was so energetic, that I was naturally led to try the effect at a greater distance.

46. For this purpose coil No. 1 was formed into a ring of about two

Fig. 4.

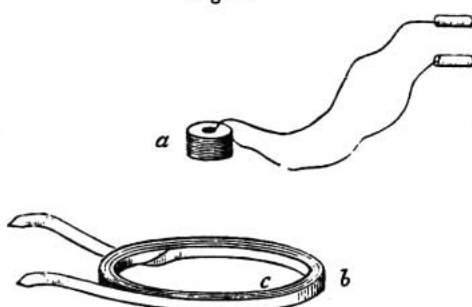

a represents helix No. 4, b coil No. 1, in the form of a ring.

feet in diameter, and helix No. 4 placed as is shown in the figure. When the helix was at the distance of about sixteen inches from the middle of the plane of the ring, shocks could be perceived through the tongue, and these rapidly increased in intensity as the helix was lowered, and when it reached the plane of the ring they were quite severe. The effect, however, was still greater, when the helix was moved from the centre to the inner circumference, as at *c*: but when it was placed without the ring, in contact with the outer circumference, at *b*, the shocks were very slight; and when placed within, but its axis at right angles to that of the ring, not the least effect could be observed.

47. With a little reflection, it will be evident that this arrangement is not the most favourable for exhibiting the induction at a distance, since the side of the ring, for example, at *c*, tends to produce a current revolving in one direction in the near side of the helix, and another in an opposite direction in the farther side. The resulting effect is therefore only the difference of the two, and in the position as shown in the figure; this difference must be very small, since the opposite sides of the helix are approximately at the same distance from *c*. But the difference of action on the two sides constantly increases as the helix is brought near the side of the ring, and becomes a maximum when the two are in the position of internal contact. A helix of larger diameter would therefore produce a greater effect.

48. Coil No. 1 remaining as before, helix No. 1, which is nine inches in diameter, was substituted for the small helix of the last experiment, and with this the effect at a distance was much increased. When coil No. 2 was added to coil No. 1, and the currents from two small batteries sent through these, shocks were distinctly perceptible through the tongue, when the distance of the planes of the coils and the three helices, united as one, was increased to thirty-six inches.

49. The action at a distance was still further increased by coiling the long wire of the large spool into the form of a ring of four feet in diameter, and placing parallel to this another ring, formed of the four ribands of coils No. 1, 2, 3 and 4. When a current from a single battery of thirty-five feet of zinc surface was passed through the riband conductor, shocks through the tongue were felt when the rings were separated to the distance of four feet. As the conductors were approximated, the shocks became more and more severe; and when at the distance of twelve inches, they could not be taken through the body.

50. It may be stated in this connection, that the galvanic induction of magnetism in soft iron, in reference to distance, is also surprisingly great. A cylinder of soft iron, two inches in diameter and one foot long, placed in the centre of the ring of copper riband, with the battery above mentioned, becomes strongly magnetic.

51. I may perhaps be excused for mentioning in this communication that the induction at a distance affords the means of exhibiting some of the most astonishing experiments, in the line of *physique amusante*, to be found perhaps in the whole course of science. I will mention one which is somewhat connected with the experiments to be described in the next section, and which exhibits the action in a striking manner. This consists in causing the induction to take place through the partition wall of two rooms. For this purpose coil No. 1 is suspended against the wall in one room, while a person in the adjoining one receives the shock, by grasping the handles of the helix, and approaching it to the spot opposite to which the coil is suspended. The effect is as if by magic, without a visible cause. It is best produced through a door, or thin wooden partition.

52. The action at a distance affords a simple method of graduating the intensity of the shock in the case of its application to medical purposes. The helix may be suspended by a string passing over a pulley, and then gradually lowered down towards the plane of the coil, until the shocks are of the required intensity. At the request of a medical friend, I have lately administered the induced current precisely in this way, in a case of paralysis of a part of the nerves of the face.

53. I may also mention that the energetic action of the spiral con-

ductors enables us to imitate, in a very striking manner, the inductive operation of the magneto-electrical machine, by means of an uninterrupted galvanic current. For this purpose it is only necessary to arrange two coils to represent the two poles of a horseshoe magnet, and to cause two helices to revolve past them in a parallel plane. While a constant current is passing through each coil, in opposite directions, the effect of the rotation of the helices is precisely the same as that of the revolving armature in the machine.

54. A remarkable fact should here be noted in reference to helix No. 4, which is connected with a subsequent part of the investigation. This helix is formed of copper wire, the spires of which are insulated by a coating of cement instead of thread, as in the case of the others. After being used in the above experiments, a small discharge from a Leyden jar was passed through it, and on applying it again to the coil, I was much surprised to find that scarcely any signs of a secondary current could be obtained.

55. The discharge had destroyed the insulation in some part, but this was not sufficient to prevent the magnetizing of a bar of iron introduced into the opening at the centre. The effect appeared to be confined to the inductive action. The same accident had before happened to another coil of nearly the same kind. It was therefore noted as one of some importance. An explanation was afterwards found in a peculiar action of the secondary current.


SECTION IV.

On the Effects produced by interposing different Substances between the Conductors.

56. Sir H. Davy found, in magnetizing needles by an electrical discharge, that the effect took place through interposed plates of all substances, conductors and nonconductors.* The experiment which I have given in paragraph 51 would appear to indicate that the inductive action which produces the secondary current might also follow the same law.

* Philosophical Transactions, 1821.

57. To test this the compound helix was placed about five inches above coil No. 1, Fig. 5, and a plate of sheet iron, about $\frac{1}{8}$ th of an inch thick, interposed. With this arrangement no shocks could be obtained; although, when the plate was withdrawn, they were very intense.

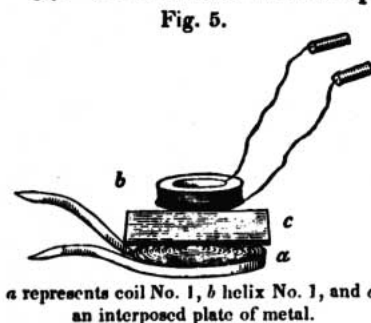

58. It was at first thought that this effect might be peculiar to the iron, on account of its temporary magnetism; but this idea was shown to be erroneous by substituting a plate of zinc of about the same size and thickness. With this the screening influence was exhibited as before.


59. After this a variety of substances was interposed in succession, namely, copper, lead, mercury, acid, water, wood, glass, &c.; and it was found that all the perfect conductors, such as the metals, produced the screening influence; but nonconductors, as glass, wood, &c., appeared to have no effect whatever.

60. When the helix was separated from the coil by a distance only equal to the thickness of the plate, a slight sensation could be perceived even when the zinc of $\frac{1}{8}$ th of an inch in thickness was interposed. This effect was increased by increasing the quantity of the battery current. If the thickness of the plate was diminished, the induction through it became more intense. Thus a sheet of tinfoil interposed produced no perceptible influence; also four sheets of the same were attended with the same result. A certain thickness of metal is therefore required to produce the screening effect, and this thickness depends on the quantity of the current from the battery.

61. The idea occurred to me that the screening might, in some way, be connected with an instantaneous current in the plate, similar to that in the induction by magnetic rotation, discovered by M. Arago. The ingenious variation of this principle by Messrs Babbage and Herschell, furnished me with a simple method of determining this point.

62. A circular plate of lead was interposed, which caused the induction in the helix almost entirely to disappear. A slip of the metal

was then cut out in the direction of a radius of the circle, as is shown in Fig. 6. With the plate in this condition, no screening was produced; the shocks were as intense as if the metal were not present.



a represents a lead plate, of which the sector *b* is cut out.

63. This experiment however is not entirely satisfactory, since the action might have taken place through the opening of the lead; to obviate this objection, another plate was cut in the same manner, and the two interposed with a glass plate between them, and so arranged that the opening in the one might be covered by the continuous part of the other. Still shocks were obtained with undiminished intensity.

64. But the existence of a current in the interposed conductor was rendered certain by attaching the magnetizing spiral by means of two wires to the edge of the opening in the circular plate, as is shown in



a represents a lead plate, *b* the magnetizing spiral.

Fig. 7. By this arrangement the latent current was drawn out, and its direction obtained by the polarity of a needle placed in the spiral at *b*.

65. This current was a secondary one, and its direction, in conformity with the discovery of Dr Faraday, was found to be the same as that of the primary current.

66. That the screening influence is in some way produced by the neutralizing action of the current thus obtained, will be clear, from the following experiment. The plate of zinc before mentioned, which is nearly twice the diameter of the helix, instead of being placed between the conductors, was put on the top of the helix, and in this position, although the neutralization was not as perfect as before, yet a great reduction was observed in the intensity of the shock.

67. But here a very interesting and puzzling question occurs. How does it happen that two currents, both in the same direction, can neutralize each other? I was at first disposed to consider the phenomenon as a case of real electrical interference, in which the impulses succeed each other by some regular interval. But if this were true the effect should depend on the length and other conditions of the current in the interposed conductor. In order to investigate this, several modifications of the experiments were instituted.

68. First a flat coil (No. 3) was interposed instead of the plates. When the two ends of this were separated, the shocks were received as if the coil were not present; but when the ends were joined, so as to form a perfect metallic circuit, no shocks could be obtained. The neutralization with the coil in this experiment was even more perfect than with the plate.

69. Again, coil No. 2, in the form of a ring, was placed not between the conductors, but around the helix. With this disposition of the apparatus, and the ends of the coil joined, the shocks were scarcely perceptible, but when the ends were separated, the presence of the coil has no effect.

70. Also when helix No. 1 and 2 were together submitted to the influence of coil No. 1, the ends of the one being joined, the other gave no shock.

71. The experiments were further varied by placing helix No. 2 within a hollow cylinder of sheet brass, and this again within coil No. 2 in a manner similar to that shown in Fig. 12, which is intended to illustrate another experiment. In this arrangement the neutralizing action was exhibited, as in the case of the plate.

72. A hollow cylinder of iron was next substituted for the one of brass, and with this also no shocks could be obtained.

73. From these experiments it is evident that the neutralization takes place with currents in the interposed or adjoining conductors of all lengths and intensities, and therefore cannot, as it appears to me, be referred to the interference of two systems of vibrations.

74. This part of the investigation was, for a time, given up almost in despair, and it was not until new light had been obtained from another part of the inquiry, that any further advances could be made towards a solution of the mystery.

In the remainder of this article, which we omit, Henry describes currents induced through chains of up to five pairs of separated coils, and the production of induced currents from the discharge of a Leyden jar. In conclusion he writes, "every part of the subject of electro-dynamic induction appears to open a field for discovery, which experimental industry cannot fail to cultivate with immediate success."